




# SMOS13N50A2

## Power MOSFETs

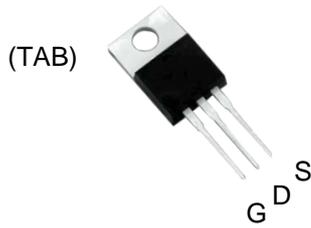

G=Gate, D=Drain,  
S=Source, TAB=Drain

### Dimensions TO-220AB

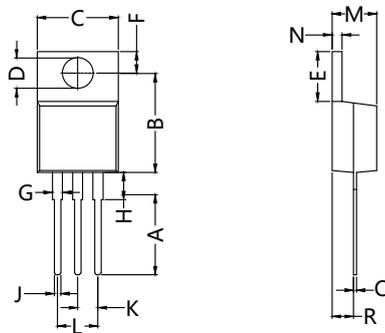

Dim.	Millimeter	
	Min.	Max.
A	12.70	13.97
B	14.73	16.00
C	9.91	10.66
ØD	3.54	4.08
E	5.85	6.85
F	2.54	3.18
G	1.15	1.65
H	2.79	5.84
J	0.64	1.01
K	2.45BSC	
L	5.05BSC	
M	4.32	4.82
N	1.14	1.39
Q	0.35	0.56
R	2.29	2.79

Symbol	Test Conditions	Maximum Ratings	Unit
$V_{DSS}$	$T_J=25^{\circ}C$ to $150^{\circ}C$	500	V
$V_{DGR}$	$T_J=25^{\circ}C$ to $150^{\circ}C$ ; $R_{GS}=1M\Omega$	500	
$V_{GS}$	Continuous	$\pm 20$	V
$V_{GSM}$	Transient	$\pm 30$	
$I_{D25}$	$T_C=25^{\circ}C$	13	A
$I_{D100}$	$T_C=100^{\circ}C$	8.2	
$I_{DM}$	$T_C=25^{\circ}C$ ; pulse width limited by $T_{JM}$	52	A
$I_{AR}$	$T_C=25^{\circ}C$	13	A
$E_{AR}$	$T_C=25^{\circ}C$	19.6	mJ
dv/dt	$I_S \leq I_{DM}$ ; $di/dt \leq 100A/us$ ; $V_{DD} \leq V_{DSS}$ ; $T_J \leq 150^{\circ}C$ ; $R_G=2\Omega$	5	V/ns
$P_D$	$T_C=25^{\circ}C$	170	W
$T_J$		-55...+150	$^{\circ}C$
$T_{JM}$		150	
$T_{stg}$		-55...+150	
$T_L$	1.6mm(0.062 in.) from case for 10s	300	$^{\circ}C$
$M_d$	Mounting torque	1.13/10	Nm/lb.in.
Weight	typical	2	g



**Sirectifier®**

# SMOS13N50A2

## Power MOSFETs

(T<sub>J</sub>=25°C, unless otherwise specified)

Symbol	Test Conditions	Characteristic Values			Unit
		min.	typ.	max.	
V <sub>DSS</sub>	V <sub>GS</sub> =0V; I <sub>D</sub> =250μA	500			V
V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> ; I <sub>D</sub> =0.25mA	2		4	V
I <sub>GSS</sub>	V <sub>GS</sub> =±20VDC; V <sub>DS</sub> =0			±100	nA
I <sub>DSS</sub>	V <sub>DS</sub> =0.8V <sub>DSS</sub> ; T <sub>J</sub> =25°C			1	μA
	V <sub>GS</sub> =0V; T <sub>J</sub> =125°C			10	μA

(T<sub>J</sub>=25°C, unless otherwise specified)

Symbol	Test Conditions	Characteristic Values			Unit
		min.	typ.	max.	
R <sub>DS(on)</sub>	V <sub>GS</sub> =10V; I <sub>D</sub> =0.5I <sub>D25</sub> Pulse test, t <sub>s</sub> ≤300μs, duty cycle≤2%		0.40	0.55	Ω
g <sub>ts</sub>	V <sub>DS</sub> =10V; I <sub>D</sub> =0.5I <sub>D25</sub> ; pulse test	11	15		S
C <sub>ies</sub>	V <sub>GS</sub> =0V; V <sub>DS</sub> =25V; f=1MHz		1600		pF
C <sub>oes</sub>			185		
C <sub>res</sub>			20		
Q <sub>g(on)</sub>	V <sub>GS</sub> =10V; V <sub>DS</sub> =0.5V <sub>DSS</sub> ; I <sub>D</sub> =0.5I <sub>D25</sub>		43		nC
Q <sub>gs</sub>			8		
Q <sub>gd</sub>			19		
t <sub>d(on)</sub>	V <sub>GS</sub> =10V; V <sub>DS</sub> =0.5V <sub>DSS</sub> ; I <sub>D</sub> =0.5I <sub>D25</sub> R <sub>G</sub> =2Ω(External)		25	55	ns
t <sub>r</sub>			100	210	ns
t <sub>d(off)</sub>			130	270	ns
t <sub>f</sub>			100	210	ns
R <sub>thJC</sub>				0.45	K/W
R <sub>thCS</sub>			0.51		K/W

### Source-Drain Diode







(T<sub>J</sub>=25°C, unless otherwise specified)

Symbol	Test Conditions	Characteristic Values			Unit
		min.	typ.	max.	
I <sub>S</sub>	V <sub>GS</sub> =0V			13	A
I <sub>SM</sub>	Repetitive; pulse width limited by T <sub>JM</sub>			52	A
V <sub>SD</sub>	I <sub>F</sub> =I <sub>S</sub> ; V <sub>GS</sub> =0V; Pulse test, t <sub>s</sub> ≤300μs, duty cycle d≤2%			1.5	V
t <sub>rr</sub>	I <sub>F</sub> =I <sub>S</sub> ; T <sub>J</sub> =25°C		112		ns
Q <sub>rr</sub>	-di/dt=100A/μs; V <sub>R</sub> =100V; T <sub>J</sub> =25°C		0.35		μC
I <sub>RM</sub>	T <sub>J</sub> =25°C		8.6		A





# SMOS13N50A2

## Power MOSFETs

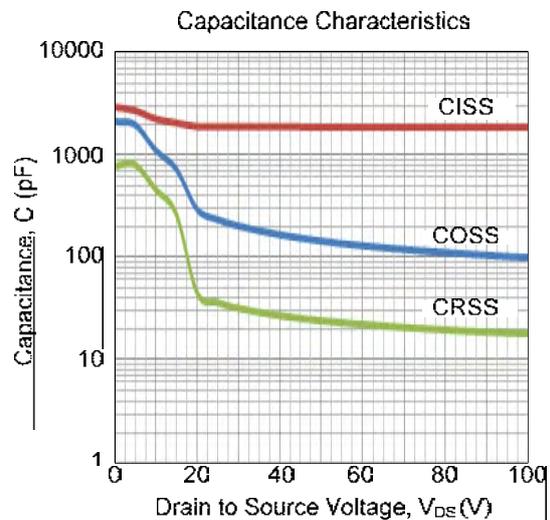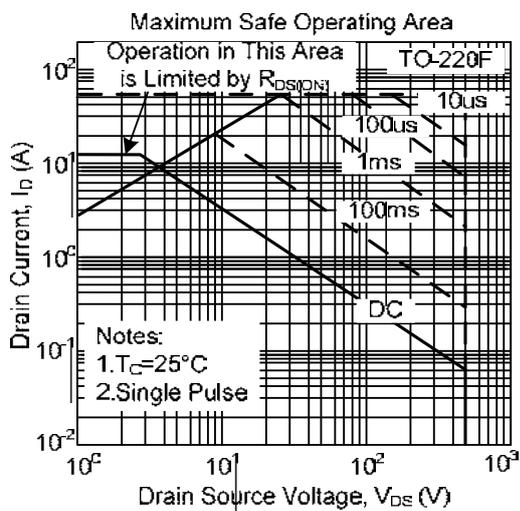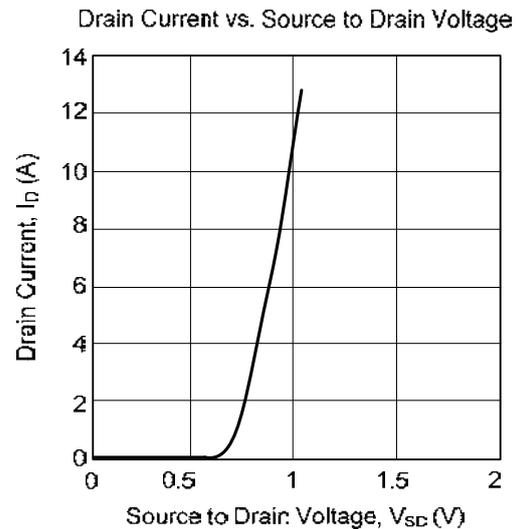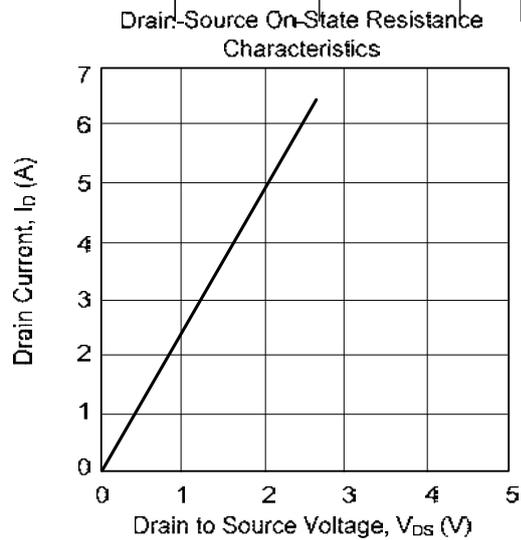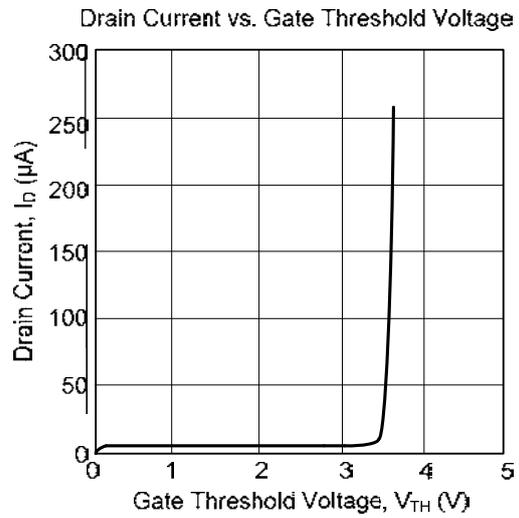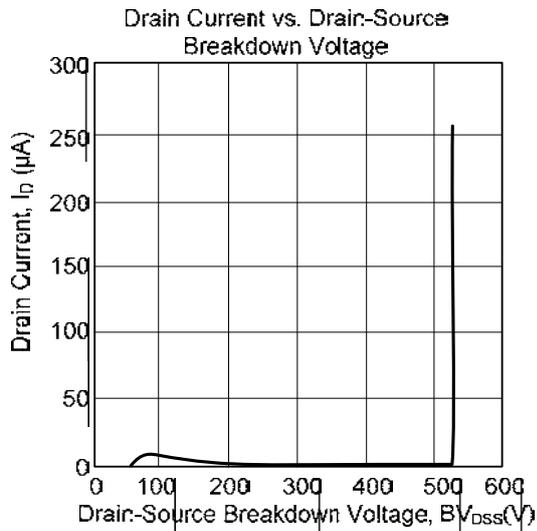

# SMOS13N50A2


## Power MOSFETs

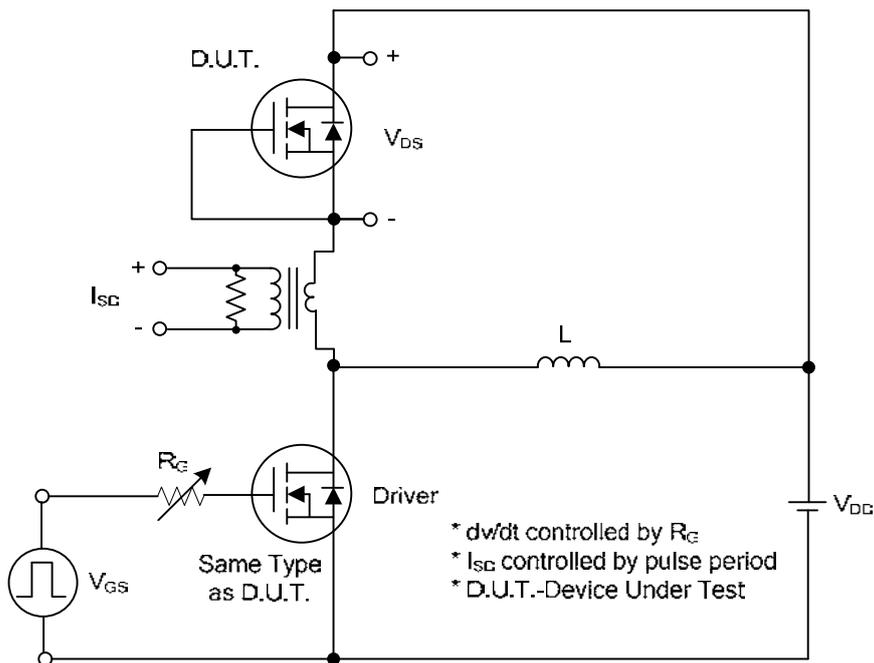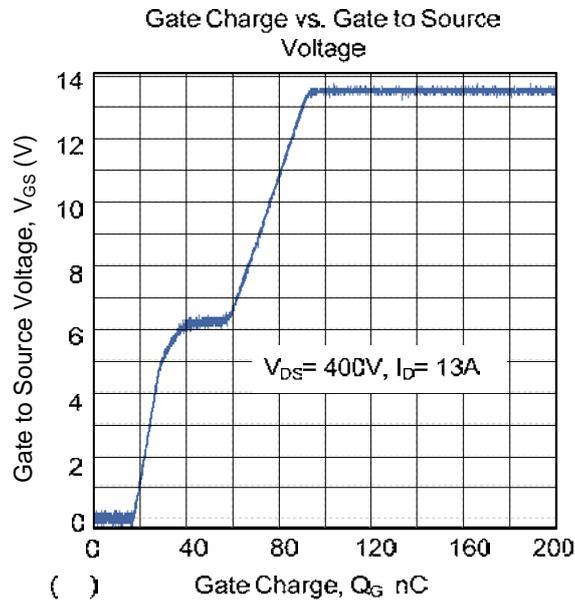


Peak Diode Recovery  $dv/dt$  Test Circuit

# SMOS13N50A2


## Power MOSFETs

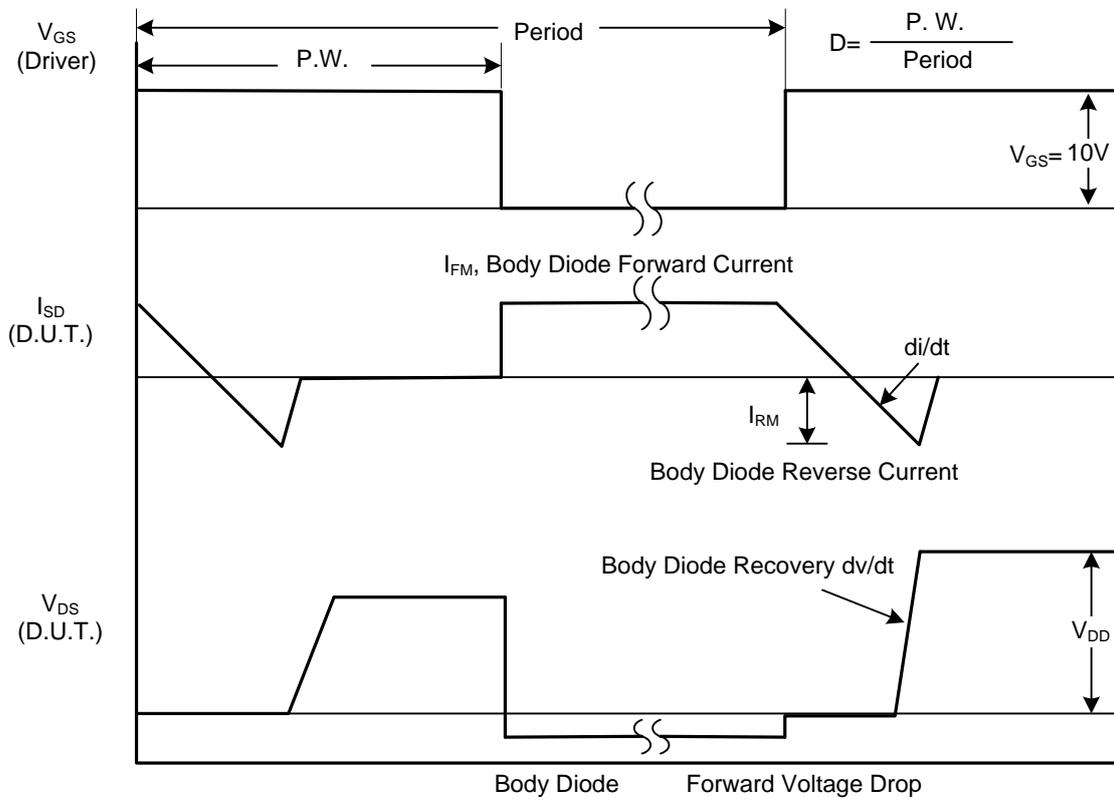

Peak Diode Recovery  $dv/dt$  Waveforms

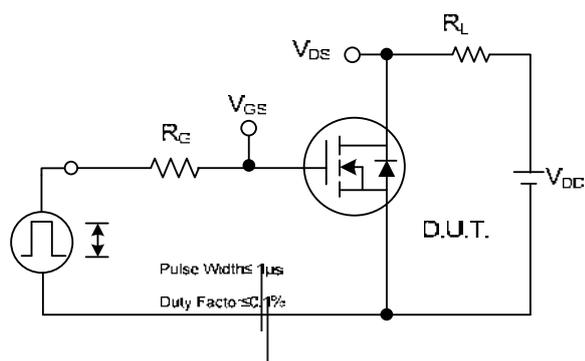


Switching Test Circuit

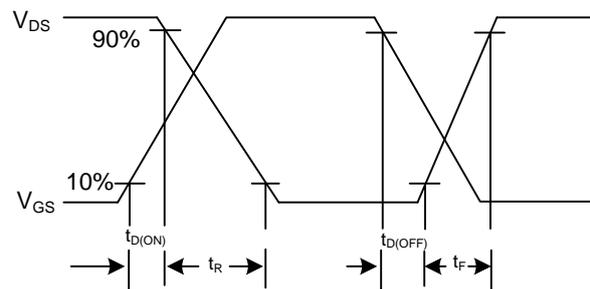


Switching Waveforms

# SMOS13N50A2


## Power MOSFETs

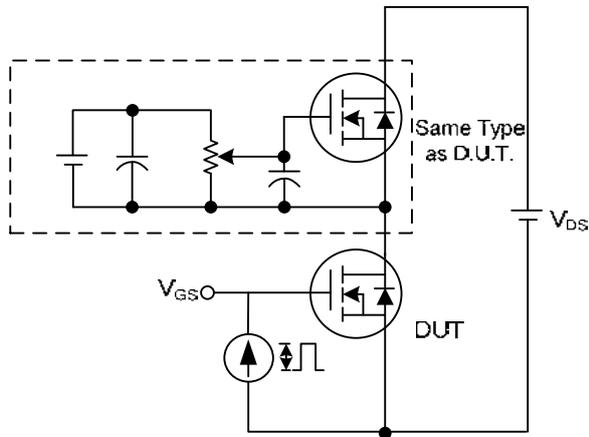


Gate Charge Test Circuit

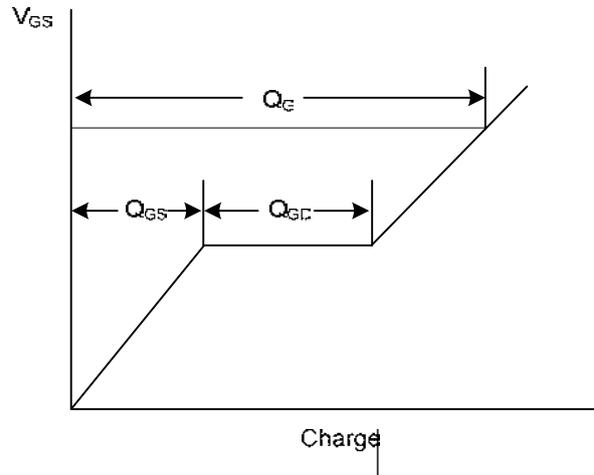

Gate Charge Waveform

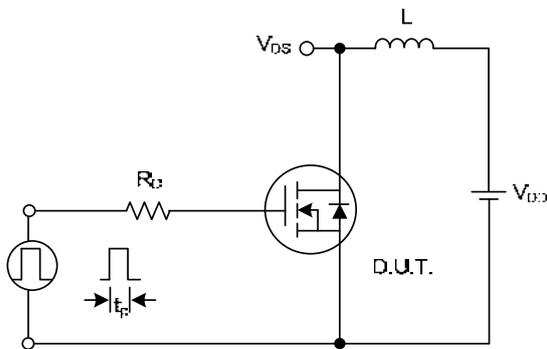


Unclamped Inductive Switching Test Circuit

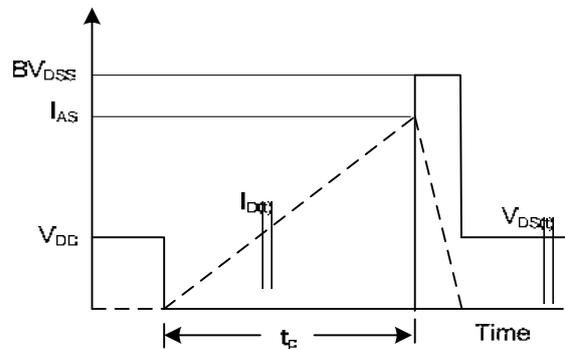

Unclamped Inductive Switching Waveforms

### Marking

SMOS13N50A2  
(TO-220AB)

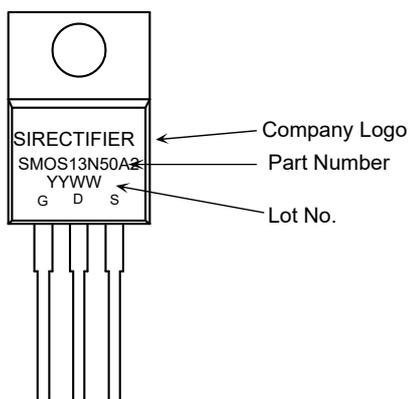

### Ordering Information

Part Number	Package	Shipping	Marking Code
SMOS13N50A2	TO-220AB	50pcs / Tube	SMOS13N50A2

**Sirectifier**<sup>®</sup>