

SMOS6N90A1 SMOS6N90A2

N Channel Power MOSFETs


SMOS6N90A1



TO-220F


- 1, Gate
- 2, Drain
- 3, Source

Dimensions TO-220F

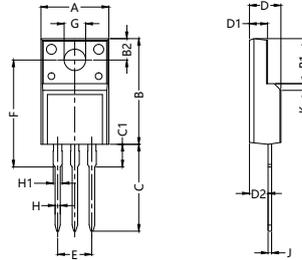

Dim.	Millimeter		Dim.	Millimeter	
	Min.	Max.		Min.	Max.
A	9.80	10.60	D2	2.30	3.30
B	15.40	16.40	E	5.08BSC	
B1	6.00	7.40	F	14.50	16.00
B2	3.20	3.80	ØG	2.90	3.40
C	12.80	13.50	H	0.60	1.00
C1	3.20	4.00	H1	1.15	1.55
D	4.35	4.95	J	0.35	0.65
D1	2.24	2.84	K	0.00	1.60


SMOS6N90A2




TO-220AB

- 1, Gate
- 2, Drain
- 3, Source
- 4, Drain Fin

Dimensions TO-220AB

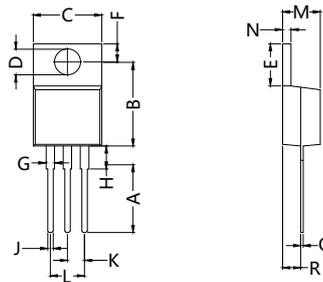

Dim.	Millimeter	
	Min.	Max.
A	12.70	13.97
B	14.73	16.00
C	9.91	10.66
ØD	3.54	4.08
E	5.85	6.85
F	2.54	3.18
G	1.15	1.65
H	2.79	5.84
J	0.64	1.01
K	2.45BSC	
L	5.05BSC	
M	4.32	4.82
N	1.14	1.39
Q	0.35	0.56
R	2.29	2.79



G=Gate, D=Drain, S=Source

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	900	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous($T_C=25^\circ\text{C}$)	I_{D25}	6	A
Drain Current-Continuous($T_C=100^\circ\text{C}$)	I_{D100}	4	A
Pulsed Drain Current	I_{DM}	24	A
Maximum Power Dissipation	TO-220	P_D	160
	TO-220F	P_D	158
Single pulse avalanche energy (Note 5)	E_{AS}	418	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 175	$^\circ\text{C}$

Thermal Characteristic

Thermal Resistance, Junction-to-Case (TO-220AB)	$R_{\theta JC}$	0.70	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case (TO-220F)	$R_{\theta JC}$	2.55	$^\circ\text{C/W}$

Sirectifier®

SMOS6N90A1 SMOS6N90A2

N Channel Power MOSFETs

Electrical Characteristics

(T_J=25°C, unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	900	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =900V, V _{GS} =0V	-	-	10	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	3	4	5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =3A	-	2.4	3.0	Ω
Forward Transconductance	g _{FS}	V _{DS} =40V, I _D =3A	-	3.0	-	S
Dynamic Characteristics (Note 4)						
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V, F=1.0MHz	-	1300	-	PF
Output Capacitance	C _{oss}		-	120	-	PF
Reverse Transfer Capacitance	C _{rss}		-	12	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =450V, I _D =6A V _{GS} =10V, R _G =25Ω	-	36	-	nS
Turn-on Rise Time	t _r		-	99	-	nS
Turn-Off Delay Time	t _{d(off)}		-	49	-	nS
Turn-Off Fall Time	t _f		-	61	-	nS
Total Gate Charge	Q _g	V _{DD} =720V, I _D =6A, V _{GS} =10V	-	27	-	nC
Gate-Source Charge	Q _{gs}		-	8.2	-	nC
Gate-Drain Charge	Q _{gd}		-	11	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V _{SD}	V _{GS} =0V, I _S =6A	-	-	1.4	V
Diode Forward Current (Note 2)	I _S		-	-	6	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F =6A di/dt =100A/μs (Note3)	-	650	-	nS
Reverse Recovery Charge	Q _{rr}		-	7.0	-	uC
Forward Turn-On Time	t _{on}	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD)				

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production
5. EAS condition : T_J=25°C, V_{DD}=30V, V_G=10V, L=0.4mH, R_G=25Ω




SMOS6N90A1 SMOS6N90A2


N Channel Power MOSFETs

Marking

SMOS6N90A1
(TO-220F)

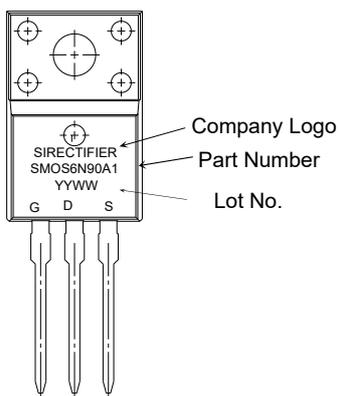

SMOS6N90A2
(TO-220AB)






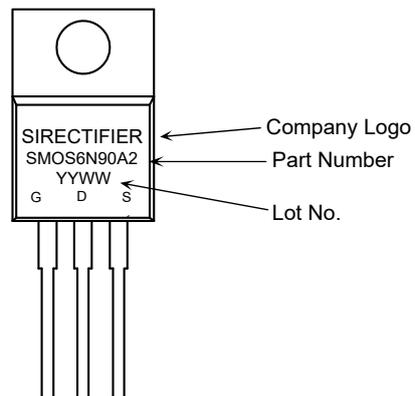


Ordering Information

Part Number	Package	Shipping	Marking Code
SMOS6N90A1	TO-220F	50pcs / Tube	SMOS6N90A1
SMOS6N90A2	TO-220AB	50pcs / Tube	SMOS6N90A2



SMOS6N90A1 SMOS6N90A2

N Channel Power MOSFETs

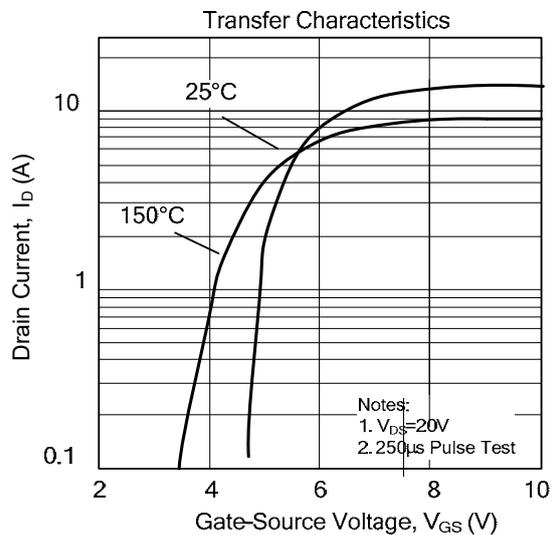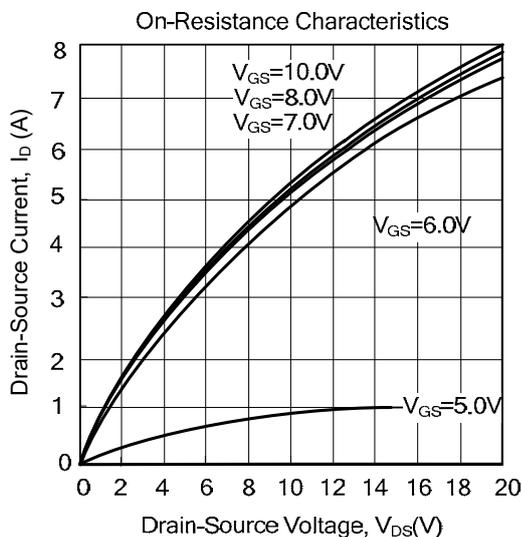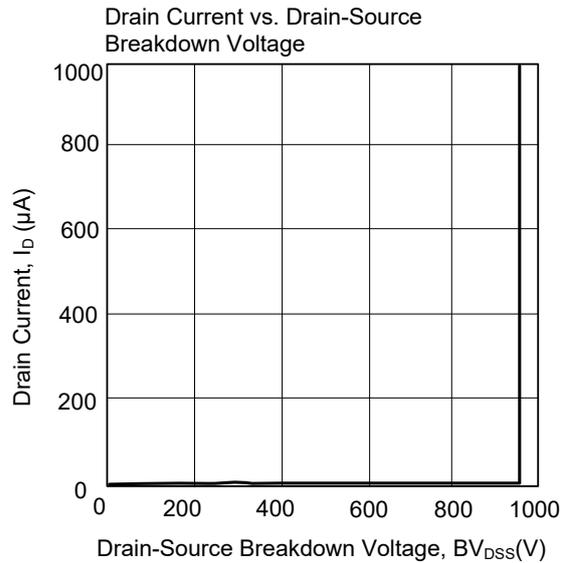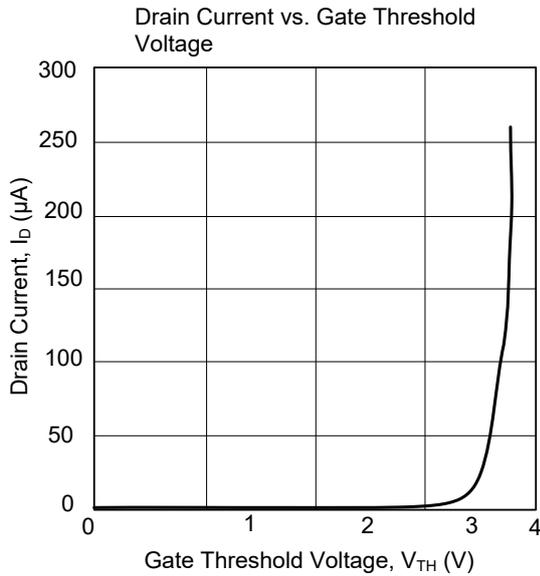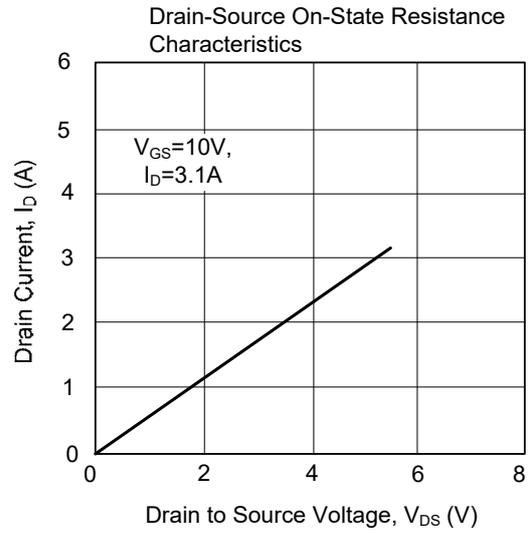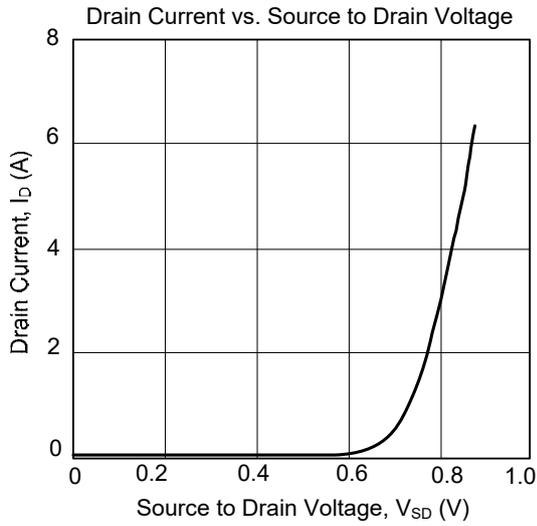

SMOS6N90A1 SMOS6N90A2





N Channel Power MOSFETs

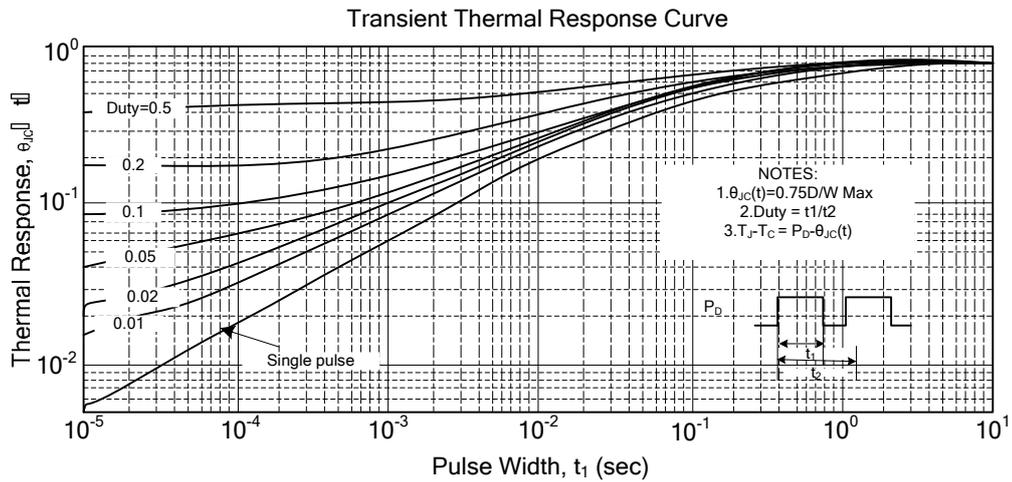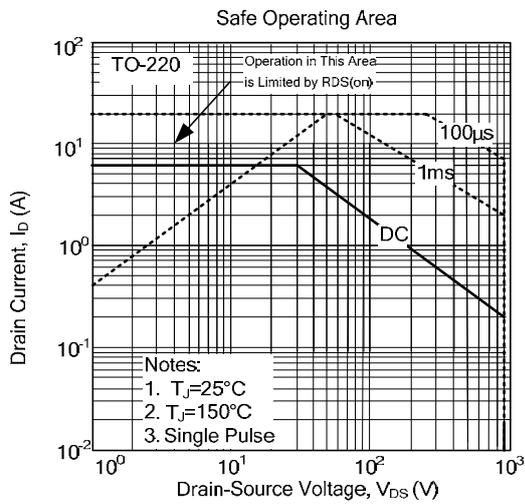

SMOS6N90A1 SMOS6N90A2

N Channel Power MOSFETs

Peak Diode Recovery dv/dt Test Circuit & Waveforms

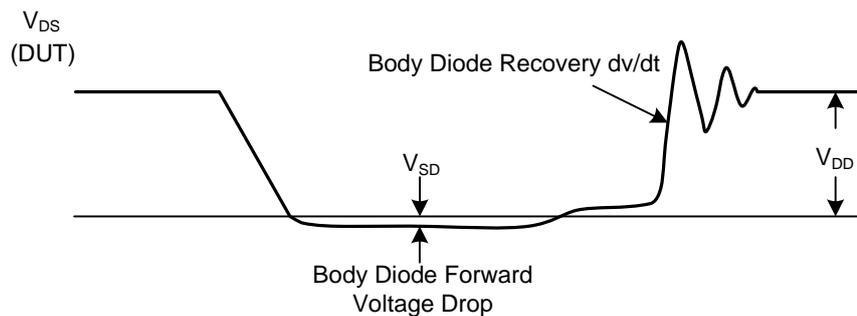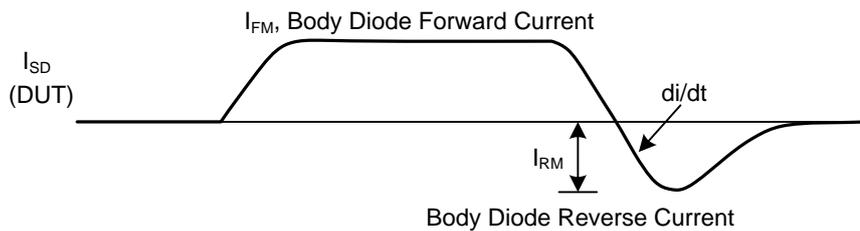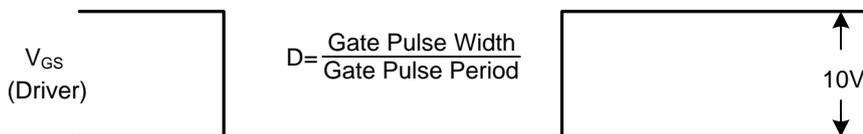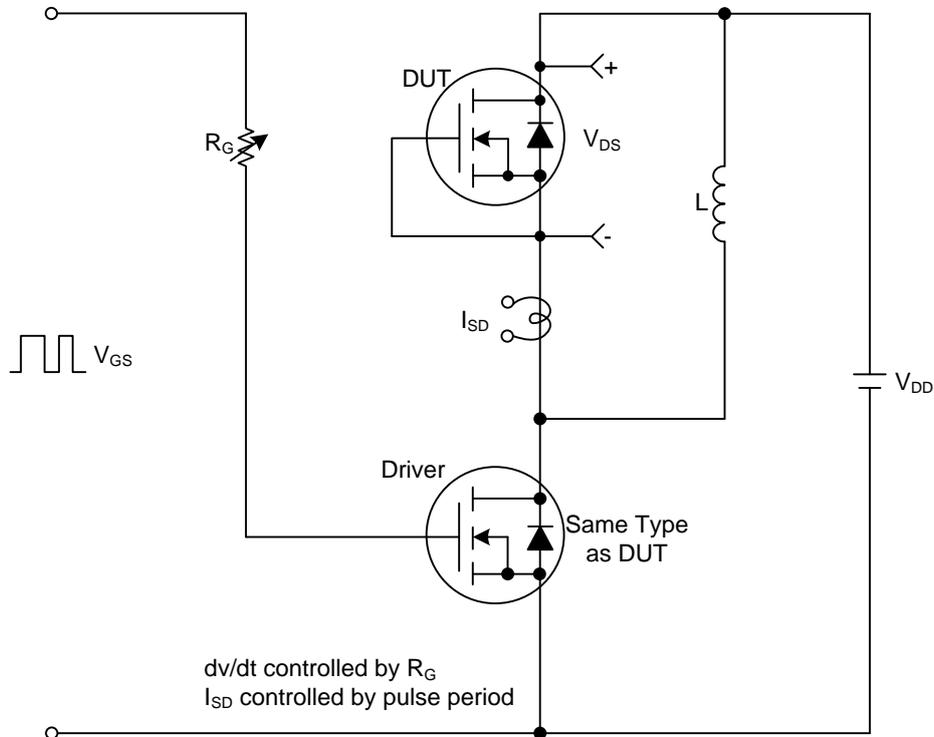

SMOS6N90A1 SMOS6N90A2

N Channel Power MOSFETs

